

## CE TYPE APPROVAL CERTIFICATE

n. **540181101/OE**

2018/03/12

This is to certify, that the hereunder described items of Personal Protective Equipment have overcome positively the "CE type examination", proving their conformity to the safety and health requirements of the Directive 89/686/EEC.

| Manufacturer:<br>(Responsible of the PPE) | <b>KOMPERDELL SPORTARTIKEL GmbH</b><br>Wagnermühle, 30 – AT 5310 MONDSEE - AUSTRIA  |  |                 |   |    |            |    |            |    |            |    |            |    |            |    |            |    |            |
|---|---|--|-----------------|---|----|------------|----|------------|----|------------|----|------------|----|------------|----|------------|----|------------|
| Type of PPE:                              | <b>Back protector for motorcycling use – Type FB</b> (full back)  |  |                 |   |    |            |    |            |    |            |    |            |    |            |    |            |    |            |
| Category of PPE:                          | <b>II:</b> Personal Protective Equipment against "medium" risks.<br>This certificate is based on reference standards listed below: its <b>validity</b> is no longer ensured should new version of the standards come into force.  |  |                 |   |    |            |    |            |    |            |    |            |    |            |    |            |    |            |
| Model                                     | <b>"CROSS 6.0 RW"</b><br>(259300-0)   |  |                 |   |    |            |    |            |    |            |    |            |    |            |    |            |    |            |
| Description:                              | <p><u>design:</u> multilayer construction in six (6) layers:</p> <p><u>6 layers of protection foam:</u></p> <ul style="list-style-type: none"> <li>- 1st layer: declared 2 mm nitril rubber black (CA 0.21-F col.1);</li> <li>- 2nd layer: declared 5 mm nitril rubber black (CA 0.21-F col.1);</li> <li>- 3rd-4-5-6th layer: declared 3 mm nitril rubber black (CA 0.21-F col.1).</li> </ul> <p><u>fastening system:</u> absent because this protector is to be inserted into special pockets in the motorcyclists' protective clothing.</p> |  |                 |   |    |            |    |            |    |            |    |            |    |            |    |            |    |            |
|   |   |  |                 |   |    |            |    |            |    |            |    |            |    |            |    |            |    |            |
| Technical Standard:                       | <b>EN 1621-2:2014</b> Motorcyclists' protective clothing against mechanical impact - Part 2: Motorcyclists' back protectors – Requirements and test method.   |  |                 |   |    |            |    |            |    |            |    |            |    |            |    |            |    |            |
| Intended use:                             | preventive use during motorcycling. This back protector must always be properly connected to its garment and implemented with all other suitable P.P.E. and sports clothing in order to ensure the most complete protection.  |  |                 |   |    |            |    |            |    |            |    |            |    |            |    |            |    |            |
| Size range:                               | <table border="1"> <thead> <tr> <th>Commercial size</th> <th>Size in accordance with EN 1621-2:2014<br/>(waist-to-shoulder length: range min.-max. in cm)</th> </tr> </thead> <tbody> <tr> <td>35</td> <td>33 – 35 cm</td> </tr> <tr> <td>37</td> <td>35 - 37 cm</td> </tr> <tr> <td>39</td> <td>37 – 39 cm</td> </tr> <tr> <td>41</td> <td>39 – 41 cm</td> </tr> <tr> <td>43</td> <td>41 – 43 cm</td> </tr> <tr> <td>45</td> <td>43 – 45 cm</td> </tr> <tr> <td>47</td> <td>45 – 47 cm</td> </tr> </tbody> </table>                          |  | Commercial size | Size in accordance with EN 1621-2:2014<br>(waist-to-shoulder length: range min.-max. in cm) | 35 | 33 – 35 cm | 37 | 35 - 37 cm | 39 | 37 – 39 cm | 41 | 39 – 41 cm | 43 | 41 – 43 cm | 45 | 43 – 45 cm | 47 | 45 – 47 cm |
| Commercial size                           | Size in accordance with EN 1621-2:2014<br>(waist-to-shoulder length: range min.-max. in cm)   |  |                 |   |    |            |    |            |    |            |    |            |    |            |    |            |    |            |
| 35  | 33 – 35 cm  |  |                 |   |    |            |    |            |    |            |    |            |    |            |    |            |    |            |
| 37  | 35 - 37 cm  |  |                 |   |    |            |    |            |    |            |    |            |    |            |    |            |    |            |
| 39  | 37 – 39 cm  |  |                 |   |    |            |    |            |    |            |    |            |    |            |    |            |    |            |
| 41  | 39 – 41 cm  |  |                 |   |    |            |    |            |    |            |    |            |    |            |    |            |    |            |
| 43  | 41 – 43 cm  |  |                 |   |    |            |    |            |    |            |    |            |    |            |    |            |    |            |
| 45  | 43 – 45 cm  |  |                 |   |    |            |    |            |    |            |    |            |    |            |    |            |    |            |
| 47  | 45 – 47 cm  |  |                 |   |    |            |    |            |    |            |    |            |    |            |    |            |    |            |
| Type <b>FB</b> (full back)                |   |  |                 |   |    |            |    |            |    |            |    |            |    |            |    |            |    |            |
| Technical File:                           | <b>DC-9043/E.</b>   |  |                 |   |    |            |    |            |    |            |    |            |    |            |    |            |    |            |

## CE TYPE APPROVAL CERTIFICATE

n. 540181101/OE

2018/03/12

Test report: RCT n°364560.01/E.

Functions and performance levels: to reduce the severity of traumas caused by impacts. The protectors provide limited protection against mechanical impact in case of falls.


Typical test results obtained (see also Test Report): method: "Kerbstone" impact testing at 50 J;  
From the values of the transmitted force obtained at standard ambient conditions and after hydrolytic treatment the

overall performance level reached is **level 2**.

Note: The Standard provides 2 performance levels with level 2 meaning the higher performance. The protective functions depend also on the correct positioning of the protector, which falls within the responsibility of the user.

Marking: printed on a label and displaying the following information:

- CE marking;
- Name and address of the Manufacturer;
- item designation (unique/unambiguous);
- pictogram indicating the intended use of the P.P.E with indication of the type and the level of performance;
- reference to the Technical Harmonized Standard;
- pictogram required by the Standard with the indication of the W-S length;
- pictogram "i in the booklet" to invite the user to read the User Manual;
- size indication.

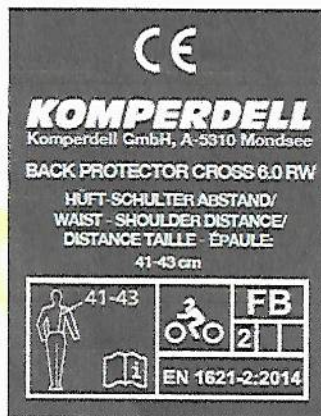

Note: the Technical File contains a more detailed description of the PPE (material, method of assembly, photographs or drawings), performance data, safety functions and level of protection, elements of conformity to the basic and supplementary requirements. The Technical File is integral part of the present Certification, which has to be kept available by the applicant to be forwarded - upon request - to the entitled person (supervising body, Controlling Officer).